

### PRACTICAL STANDARD SERIES

- To prevent fungi and molds, the %RH should be within 30%~60%.
- The protection coating of lens will be damaged if %RH too low.
- DRY-60, 70, 100, 120L are without temperature indicator (optional).



**DRY-60**  
 EX: W400 × D442 × H556mm  
 IN: W398 × D385 × H480mm  
 CAPACITY: 71L SHELF: 2PCS  
 WEIGHT: 15KGS MAX/AVG 23W/5W




**DRY-70**  
 EX: W400 × D442 × H652mm  
 IN: W398 × D385 × H576mm  
 CAPACITY: 88L SHELF: 2PCS  
 WEIGHT: 17KGS MAX/AVG 23W/5W



**DRY-100**  
 EX: W400 × D442 × H882mm  
 IN: W398 × D385 × H808mm  
 CAPACITY: 124L SHELF: 3PCS  
 WEIGHT: 20KGS MAX/AVG 30W/7W



**DRY-120L**  
 EX: W806 × D430 × H480mm  
 IN: W804 × D375 × H405mm  
 CAPACITY: 122L SHELF: 2PCS  
 WEIGHT: 20KGS MAX/AVG 30W/7W

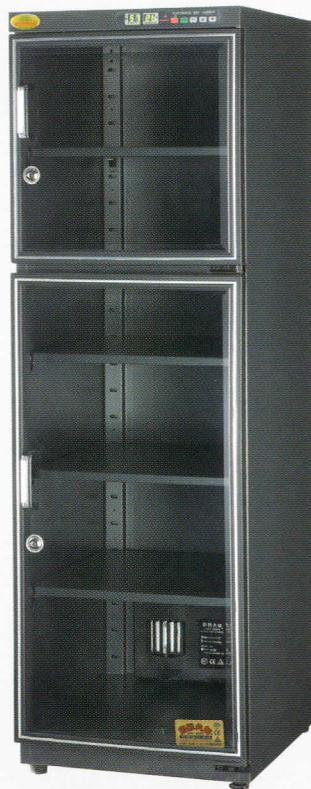

**DRY-205**  
 EX: W400 × D530 × H1292mm  
 IN: W398 × D475 × H1210mm  
 CAPACITY: 228L SHELF: 5PCS  
 WEIGHT: 30KGS MAX/AVG 30W/12W



**DRY-190L**  
 EX: W806 × D480 × H656mm  
 IN: W804 × D420 × H575mm  
 CAPACITY: 194L SHELF: 2PCS  
 WEIGHT: 26KGS MAX/AVG 30W/12W  
 NO MIDDLE PILLAR

